



# X-90 Solar Charger

Patent pending

## Portable Fast-Charge Solar Battery Charger

### Features

- ◆ Maximum Power Point Tracking
  - Up to 30% more power
- ◆ Universal Charging Algorithm
  - Identifies battery chemistry automatically
- ◆ No User Input Required
- ◆ Fully Ruggedized Design
- ◆ Over Temperature Protection
- ◆ Wide-Range DC Input Capable
- ◆ 12V or 24V Solar Panel Input - No Minimum/Maximum Solar Panel Wattage
- ◆ Polarized SAE plug to connect to solar panel
- ◆ Extension input cable for use with other solar panels or DC sources
- ◆ Included “Y” adapter, to parallel multiple solar panels for maximum charge speed



### Description

The X-90 Solar Charger is a portable solar battery charger capable of charging a wide array of typical portable rechargeable batteries. The charger features advanced digital control, which enables automatic battery detection, maximum power point tracking (MPPT) of the solar panel, and value-added features such as a fixed DC input mode and a fixed DC output mode. The charger is able to operate from any solar panel configuration with  $V_{open\ circuit} < 60V$ . The charger directly plugs onto the top of the supported batteries, and the only wiring needed is the connection to the solar panel or DC source using a polarized SAE plug. The advanced charge controller minimizes charge time by charging two battery strings simultaneously, while monitoring critical parameters to ensure safety and reliability. The implementation of high-speed MPPT delivers maximum charging current, even in low light or poor weather conditions. The simple LED interface informs the user when the batteries have been completely charged, and if there are any fault conditions.

Supported batteries	Chemistry
BB-2590/U	Li-Ion
BB-590/U	NiCd
BB-390B/U	NiMH



# X-90 Solar Charger

Patent pending

## Absolute Maximum Ratings

	Parameters	Max.	Units
$V_{in}$	Input Voltage	65	V
$V_o$	Output Voltage	20	V
$I_o$	Output Current (Total)	6	A
$T_A$	Ambient Operating Temperature	60	°C
$T_{STG}$	Storage Temperature	85	°C

**Table 1: Absolute Maximum Ratings**

## Recommended Operating Conditions

$T_A=25^{\circ}\text{C}$

	Parameters	Min.	Typ.	Max.	Units	Conditions
$V_{in}$	12V PV Panel Voltage	$V_o+1\text{V}$	20	28	V	(4)
	24V PV Panel Voltage	$V_o+1\text{V}$	40	56	V	(3)
	DC Input Voltage	20	-	60	V	
$V_o$	Output Voltage	10	-	20	V	
$I_o$	Output Current	0	-	6	A	
$I_s$	Self Consumption	-	55	-	mA	$V_{in}=10\text{V}$
		-	14	-	mA	$V_{in}=65\text{V}$
$\eta$	Converter Efficiency	-	96.1	-	%	$V_{in}=40\text{V}, V_o=16\text{V}, I_o=6\text{A}$ (1,3)
		-	95.5	-	%	$V_{in}=40\text{V}, V_o=13\text{V}, I_o=4\text{A}$ (2,3)
$T_A$	Ambient Operating Temperature	- 30	-	60	°C	
$T_{STG}$	Storage Temperature	- 50	-	85	°C	

**Table 2: Electrical Characteristics**

### Notes:

- (1) Charging a BB-2590/U Li-Ion battery with the rated max. charge current
- (2) Charging a BB-390B/U NiMH or BB-590/U NiCd battery with the rated max. charge current
- (3) Using a "24V" PV array
- (4) Using a "12V" PV array



**Label on Top of Charger**



Red LED  
Green LED 1  
Green LED 2

**LED Status Information**

<u>Red LED</u>	<u>Green LED 1</u>	<u>Green LED 2</u>	<u>Meaning</u>	<u>Action to take</u>
Off	Off	Off	Ready to connect	Connect battery
Off	Blinking slowly	Blinking	Analyzing battery chemistry	-
Off	Off	Blinking <sup>(2)</sup>	Charging	-
Off <sup>(1)</sup>	On <sup>(1)</sup>	Blinking <sup>(1,2)</sup>	Charging, battery is 85% full <sup>(1)</sup>	<b>Optional:</b> Disconnect battery and connect a lower charged battery. In the time it takes to charge the last 15%, the first 50% of an empty battery could be charged. <sup>(1)</sup>
Off	On	On	Finished charging	Disconnect battery
Blinking	-	Blinking	Temporary Fault condition	The X-90 is always trying to reset faults. Keep an eye on the X-90 since it might not be able to clear the current fault which would lead to a latched fault.
On	-	-	Latched Fault, converter not running	Check connections, make sure that operation of converter is within the maximum ratings, unplug and plug in again battery and source

**Table 3: LED status information**

**Notes:**

<sup>(1)</sup> Only applies when charging Li-Ion

<sup>(2)</sup> Blinking speed is based on power delivered to the battery:

(~0.6 to 20) blinking cycles per second for a total output current range of (~0.2 to 6) Amps



## **Typical Charging Times**

The charging times below are only valid with the solar panel's temperature at 25°C (77°F). Higher temperatures lead to a decreased power output which makes the charge time longer.

<b>Battery</b>	<b>Chemistry</b>	<b>Capacity (Ah)</b>	<b>Max Charge Current</b>	<b>Solar Panel (Watts)</b>	<b>Typical Full Charge Time (Hours)</b>
BB-2590	Li-Ion	14.4	3A/String	62	4.5
UBI-2590				2 X 48	3
BB-390	NiMH	9.8	2A/String	62	3
BB-590	NiCd	4.8	2A/String	62	1.5

**Table 4: Typical Charging Times**



**Dimensions and Weight**

	Parameters	Typ.	Units
L	Length	116.7	mm
		4.596	inch
W	Width	67.2	mm
		2.646	inch
H	Height	41	mm
		1.615	inch
W	Weight	0.46	kg
		1.01	lbs

Table 5: X-90 Dimensions (without cap) and Weight

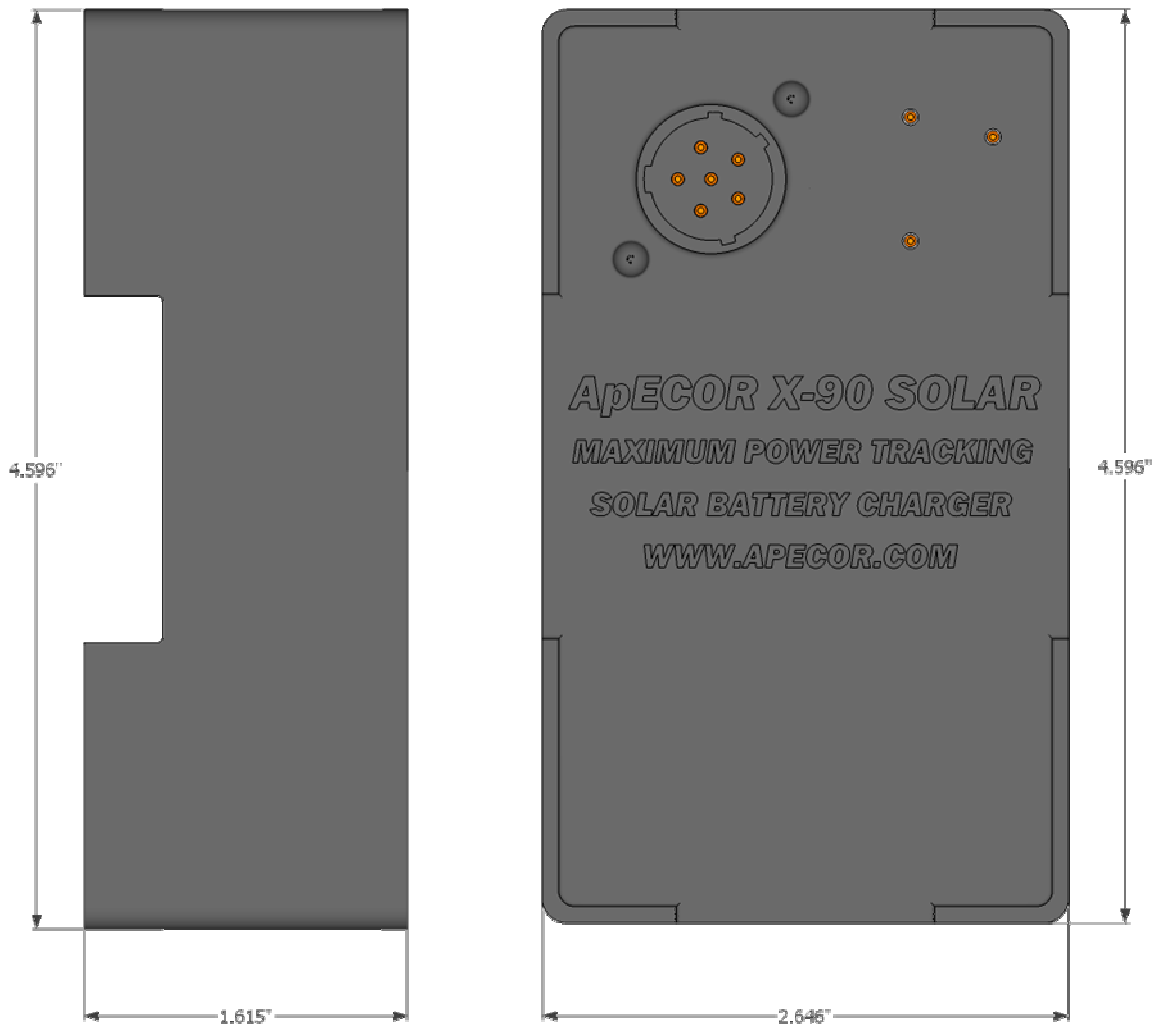


Figure 1: X-90 Dimensions (without cap)

**Application Example**



**Figure 2: X-90 charging a Bren-Tronics BB2590/U using the Global Solar P3-62W/24V panel**



# X-90 Solar Charger

Patent pending

---

## **Recommended Solar Panels**

Use only “12V” or “24V” PV Arrays

Global Solar Energy, Inc.

- P3 - 62W/12V, P3 - 62W/24V
- P3 - 55W/12V
- P3 - 48W/12V, P3 - 48W/24V
- Can use solar panels in parallel with “Y” connector to increase maximum charge speed

## **Recommended Batteries**

Mathews Associates, Inc.

- BB-2590/U, BB-390A/U, BB-590/U,

Bren-Tronics

- BB-2590/U, BB-390B/U, BB-590/U

Patco Electronics, Inc.

- BB-2590/U

UltraLife Batteries

- UBBL02 (UBI-2590), UBBL10 (UBI-2590 SMBus)